

Bullseye level body plastic

Item description/product images



Winkelminute	Grad in Dezimalform	Höhenunterschied in Millimeter pro Meter
1'	0,0167°	0,291 mm
5'	0,0833°	1,455 mm
10'	0,1667°	2,910 mm
20'	0,3333°	5,820 mm
25'	0,4167°	7,275 mm
30'	0,5000°	8,730 mm
40'	0,6667°	11,640 mm
50'	0,8333°	14,550 mm
53'	0,8833°	15,423 mm

Description

Material:
Polyamide

Version:
Ivory coloured.

Note:

Bubble levels are used as a type of zero indicator instrument for checking horizontal inclination in e.g. spirit levels, inclinometers, metrology instruments and machine constructions.


With internal black contrast ring for better bubble contour.

- Protruding fill point underneath.
- Sensitivity in angular minutes for 2 mm bubble travel
- Clear filling

Temperature range:

-35 °C up to +55 °C.

Drawings

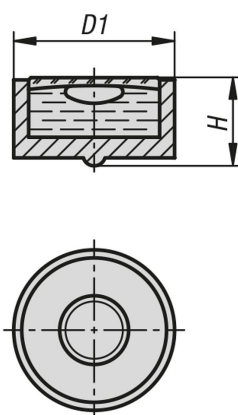

Overview of items

Bullseye level body plastic

Order No.	D1	H	Sensitivity
K1157.120720	12	7	20'
K1157.140730	14	7,7	30'
K1157.150720	15	7,7	20'
K1157.180930	18	9,2	30'
K1157.201040	20	10,6	40'
K1157.251230	25	11,5	30'

