

Tubular bubble levels with frame to screw on

Item description/product images



Winkelminute	Grad in Dezimalform	Höhenunterschied in Millimeter pro Meter
1'	0,0167°	0,291 mm
5'	0,0833°	1,455 mm
10'	0,1667°	2,910 mm
20'	0,3333°	5,820 mm
25'	0,4167°	7,275 mm
30'	0,5000°	8,730 mm
40'	0,6667°	11,640 mm
50'	0,8333°	14,550 mm
53'	0,8833°	15,423 mm

Description

Material:
 Frame brass.
 Tubular bubble vial glass.

Version:
 Nickel-plated and high-gloss polished. Form B: black anodised.


Note:
 Bubble levels are used as a type of zero indicator instrument for checking horizontal inclination in e.g. spirit levels, inclinometers, metrology instruments and machine constructions.

The tubular levels can be fastened using the two holes.

- Form A: one sight window
- Form B: three sight windows
- Sensitivity in angular minutes for 2 mm bubble travel
- Green filling

Temperature range:
 -35 °C up to +55 °C.

Drawings

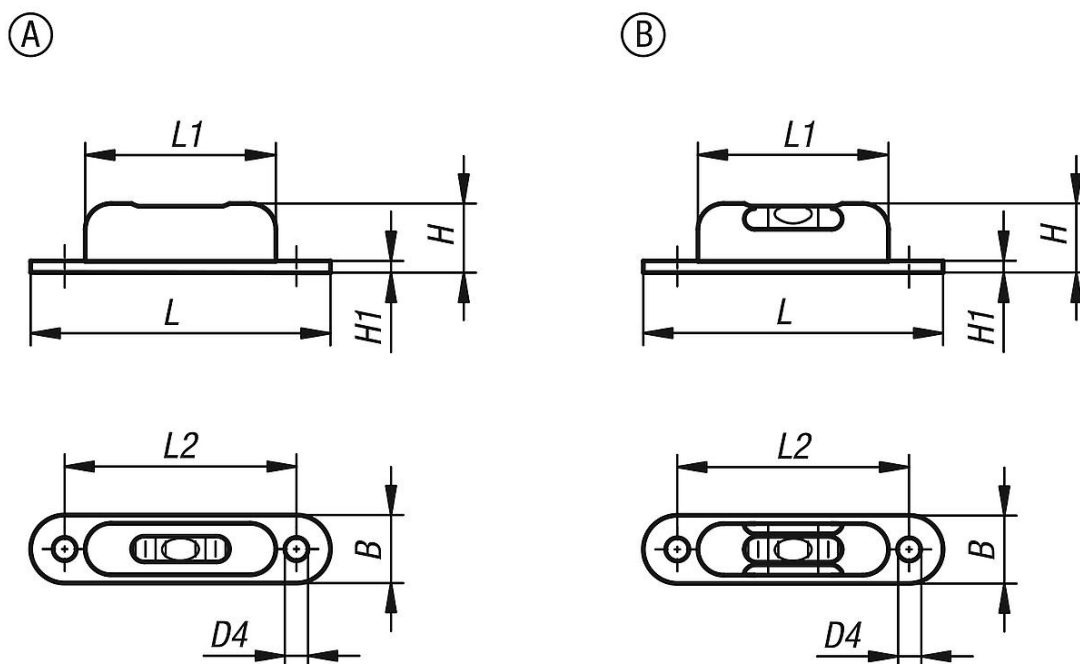

Overview of items

Tubular levels with frame to screw down

Order No.	Form	B	D4	H	H1	L	L1	L2	Sensitivity
K1158.1571350	A	12,3	-	13	1	57	37	45	50'
K1158.2571305	B	12,3	-	13	1	57	37	45	5'

