

## Wheels polyamide with injection-moulded tread

### Item description/product images



### Description

#### Material:

Wheel body PA.

Tread thermoplastic polyurethane elastomer.


#### Note:

Wheels with polyurethane tread have a high load capacity, resist abrasion, are gentle to floors, absorb shocks and vibration and are resistant to many chemicals and acids.

Temperature resistant from -30 °C to +80 °C.

Suitable as replacement rollers for the castors K1764.

### Drawings

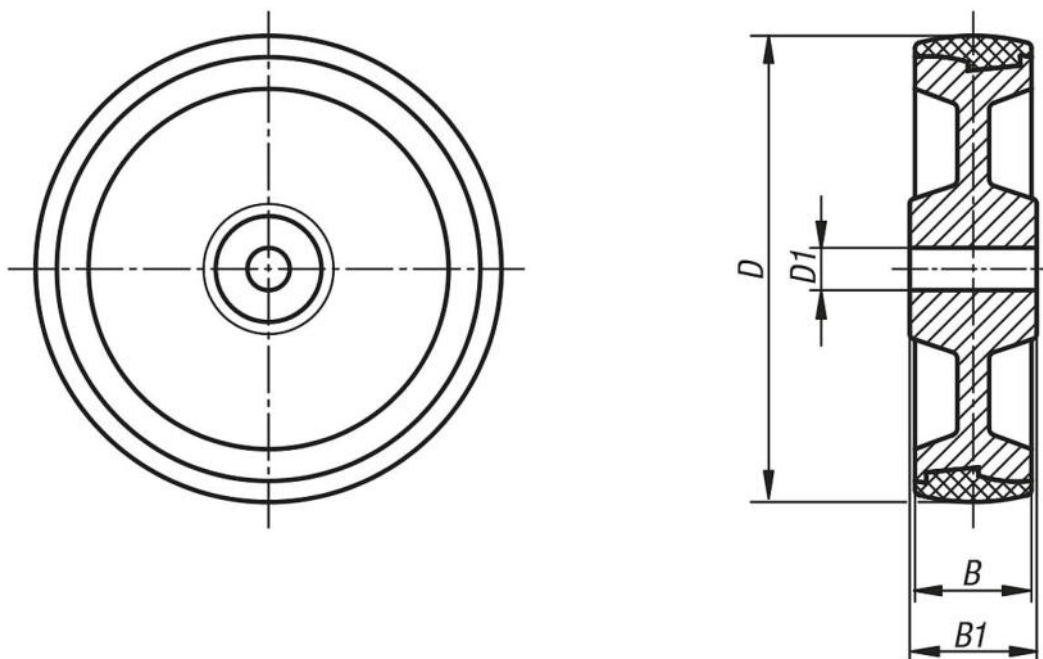

### Overview of items

#### Wheels polyamide with injection-moulded tread

Order No.	D	D1	B	B1	Permissible load kg
K1778.10035	100	15	35	45	200
K1778.12535	125	15	35	45	250
K1778.15040	150	20	40	60	400
K1778.20050	200	20	50	60	700