# Wheels heavy-load wheel body welded



### Item description/product images



## **Description**

#### **Material:**

Wheel body welded steel construction. Tread Extrathane®.


#### Note:


Extrathane treads are elastic, resist abrasion, gentle to floors, low-noise and have particularly high elastic restoration after long standing.

Application temperature from -40 °C to +80 °C.

Suitable as replacement rollers for the castors K1768 and K1769.

### **Drawings**

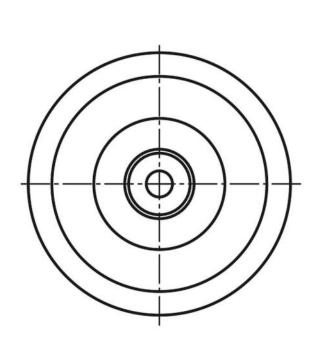

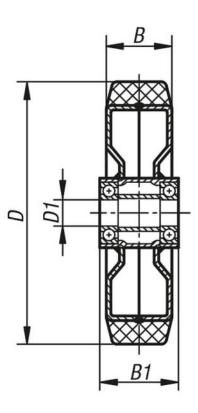

#### **Overview of items**

### Wheels heavy-load wheel body welded

Order No.	D	D1	В	B1	Permissible load kg
K1782.12550	125	20	50	60	500
K1782.16050	160	20	50	60	700



# Wheels heavy-load wheel body welded



## **Overview of items**

Order No.	D	D1	В	B1	Permissible load kg
K1782.20050	200	20	50	60	1000
K1782.25060	250	25	60	70	1350