

## Toggle clamps hook horizontal with catch plate

### Item description/product images



### Description

#### Material:

Steel or stainless steel.

#### Version:

Electro zinc-plated steel.

Bright stainless steel.

Plastic handle, oil-resistant.


#### Note:

Horizontal hook toggle clamps are especially suitable for quickly closing and locking covers and hatches.

The amount of travel can be set by altering the hook length.

Adjustment length: 0 - 5 mm.

### Drawings

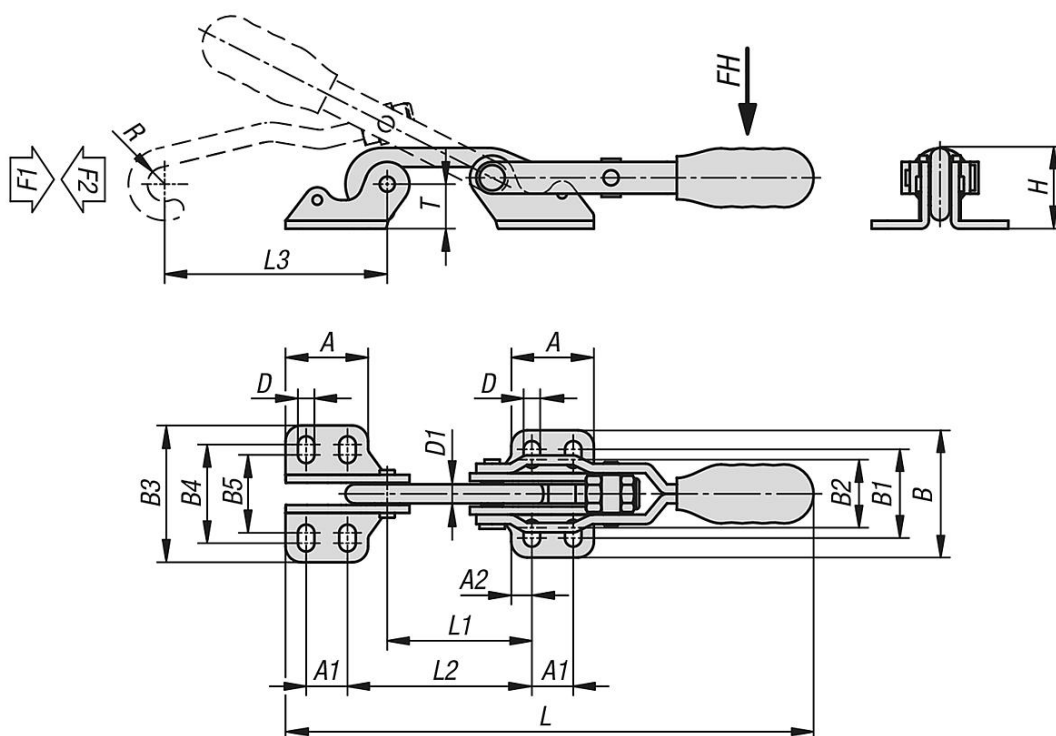

### Overview of items

## Toggle clamps hook horizontal with catch plate

### Overview of items

#### Toggle clamps hook horizontal with catch plate

| Order No.   | Main material   | Opening angle of handle | Hand force FH N | Traction force F1 N | Retaining force F2 N |
|-------------|-----------------|-------------------------|-----------------|---------------------|----------------------|
| K1432.02000 | steel           | 153°                    | 100             | 1500                | 2000                 |
| K1432.04000 | steel           | 155°                    | 160             | 3000                | 4000                 |
| K1432.07000 | steel           | 155°                    | 200             | 4000                | 7000                 |
| K1432.12000 | stainless steel | 153°                    | 100             | 1500                | 2000                 |
| K1432.14000 | stainless steel | 155°                    | 160             | 3000                | 4000                 |
| K1432.17000 | stainless steel | 155°                    | 200             | 4000                | 7000                 |

| Order No.   | Main material   | A  | A1 | A2  | B    | B1   | B2   | B3 | B4 | B5   | D   | D1 | H    | L   | L1   | L2  | Clamping travel L3 | R   | T  |
|-------------|-----------------|----|----|-----|------|------|------|----|----|------|-----|----|------|-----|------|-----|--------------------|-----|----|
| K1432.02000 | steel           | 26 | 13 | 6,5 | 40   | 28   | 21,5 | 43 | 31 | 24,5 | 5,2 | 6  | 25,4 | 167 | 45,5 | 58  | 70                 | 5,4 | 14 |
| K1432.04000 | steel           | 35 | 19 | 8   | 52   | 36   | 29   | 57 | 41 | 34   | 6,5 | 8  | 35   | 247 | 68,2 | 84  | 90                 | 7   | 20 |
| K1432.07000 | steel           | 51 | 32 | 9,5 | 71,5 | 52,5 | 43,5 | 78 | 59 | 50   | 8,5 | 12 | 49,3 | 314 | 84   | 104 | 115                | 10  | 27 |
| K1432.12000 | stainless steel | 26 | 13 | 6,5 | 40   | 28   | 21,5 | 43 | 31 | 24,5 | 5,2 | 6  | 25,4 | 167 | 45,5 | 58  | 70                 | 5,4 | 14 |
| K1432.14000 | stainless steel | 35 | 19 | 8   | 52   | 36   | 29   | 57 | 41 | 34   | 6,5 | 8  | 35   | 247 | 68,2 | 84  | 90                 | 7   | 20 |
| K1432.17000 | stainless steel | 51 | 32 | 9,5 | 71,5 | 52,5 | 43,5 | 78 | 59 | 50   | 8,5 | 12 | 49,3 | 314 | 84   | 104 | 115                | 10  | 27 |