

Toggle clamps horizontal with safety interlock with straight foot and adjustable clamping spindle, stainless steel

Item description/product images

KIPPl⁺ock



Description

Material:

Stainless steel.
Grip polyamide.
Unlocking bracket TPE.

Version:

Bright.
Grip blue, black or red.

Note:

Maintenance-free high quality link bushings. Sustainable constant force during opening and closing. Optimum stability through the conical, U-profile clamping arm. Including internal bar lock with automatic safety catch.

On request:

Other grip colours.


Accessory:

K0106
K0384
K0390
K0392
K0667



Toggle clamps horizontal with safety interlock with straight foot and adjustable clamping spindle, stainless steel

Drawings

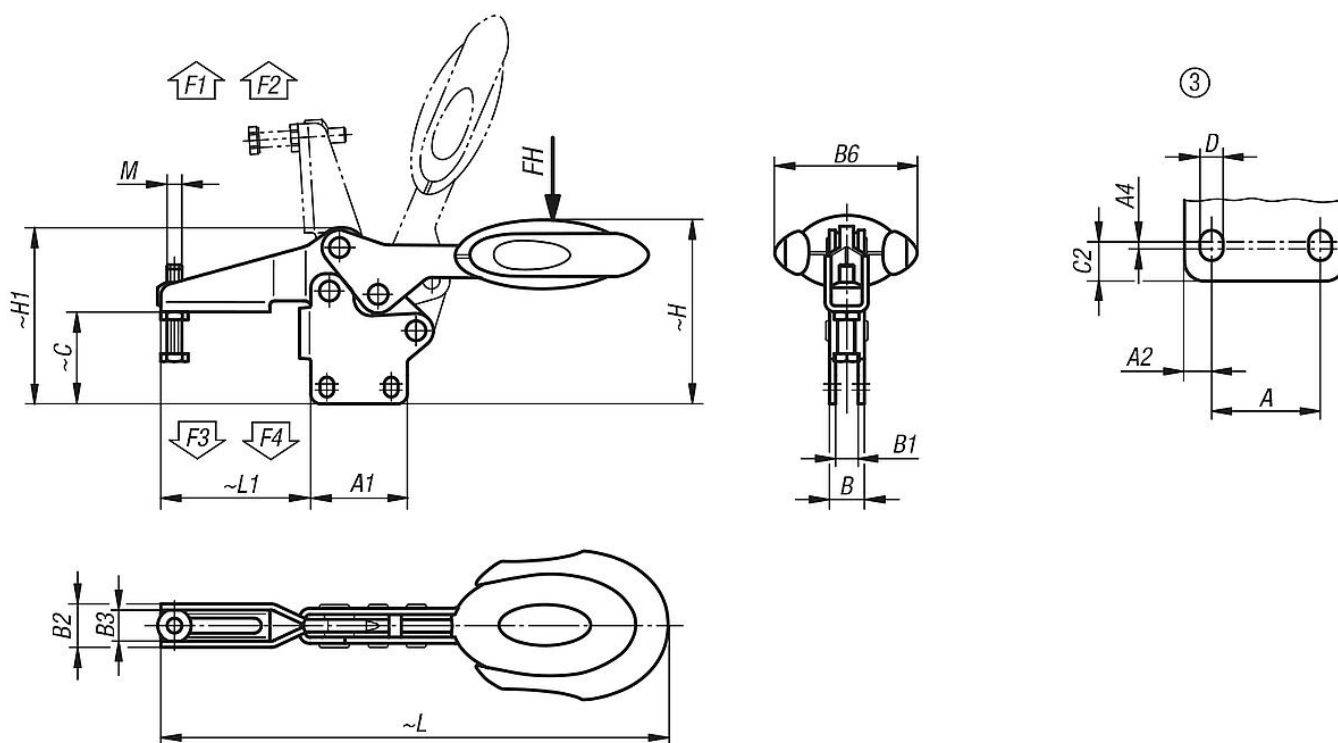

Overview of items

Toggle clamps horizontal with safety interlock with straight foot and adjustable clamping spindle, stainless steel

Order No.	Component colour	hole arrangement	Opening angle of holding arm	Opening angle of handle	Hand force FH N	Retaining force F1 N	Retaining force F2 N	Clamping force F3 N	Clamping force F4 N
K0661.106101	ultramarine RAL 5002	3	86°	67°	160	1350	1900	720	1200
K0661.108101	ultramarine RAL 5002	3	86°	67°	200	2000	2800	830	1400
K0661.106100	black grey RAL 7021	3	86°	67°	160	1350	1900	720	1200
K0661.108100	black grey RAL 7021	3	86°	67°	200	2000	2800	830	1400
K0661.106103	red	3	86°	67°	160	1350	1900	720	1200
K0661.108103	red	3	86°	67°	200	2000	2800	830	1400

Order No.	Component colour	M	A	A1	A2	A4	B	B1	B2	B3	B6	C	C2	D	H	H1	L	L1
K0661.106101	ultramarine RAL 5002	M6x35	26	39	6,5	2,5	14,1	9,1	17,5	12,5	53,4	36,9	8	5,5	75,2	71	193,3	60,5
K0661.108101	ultramarine RAL 5002	M8x45	26	44	9	3,5	14,1	9,1	21	16	51,1	46,5	10,5	6,2	88,2	84,3	230,4	74,9
K0661.106100	black grey RAL 7021	M6x35	26	39	6,5	2,5	14,1	9,1	17,5	12,5	53,4	36,9	8	5,5	75,2	71	193,3	60,5
K0661.108100	black grey RAL 7021	M8x45	26	44	9	3,5	14,1	9,1	21	16	51,1	46,5	10,5	6,2	88,2	84,3	230,4	74,9
K0661.106103	red	M6x35	26	39	6,5	2,5	14,1	9,1	17,5	12,5	53,4	36,9	8	5,5	75,2	71	193,3	60,5
K0661.108103	red	M8x45	26	44	9	3,5	14,1	9,1	21	16	51,1	46,5	10,5	6,2	88,2	84,3	230,4	74,9