

Clamping levers antistatic external thread, plastic grip



Item description/product images





lift to disengage



Description

Material:

Handles reinforced plastic, toothed ring die-cast zinc. Steel parts grade 5.8.

Version

Steel parts black oxidised, handles graphite black.

Application:

Sensitive electrical or electronic equipment, components and devices (ESD sensitive elements) may be damaged or destroyed by electrostatic discharges (ESD) in the immediate vicinity.

Electrostatic discharges can come from people or through handling ESD sensitive components (e.g. during production, assembly, transport, storage etc). Electrically conductive products which conform to DIN EN 61340-5-1 are essential

within electronic environments to prevent an electrostatic discharge.

These products can be used for ESD applications or in ESD protection areas (EPA) in accordance with DIN EN 61340-5-1.

Safety

These ESD products can also be used for devices, components and protection systems in areas with high risk of explosion.

Use of these ESD products prevents the occurrence of electrostatic spark discharges, eliminating the potential ignition of gases and dusts which could lead to explosions in enclosed spaces.

Manufacturers and operators must use and conform to ATEX directives for the protection of persons working in areas with high risk of explosion.

These ESD products are certified by TÜV-Süd in relation to their electrical discharge capability.

Target groups:

Device manufacturers required to conform to ATEX product directive 2014/34/EU. Operators required to conform to ATEX worker protection directive 1999/92/EC.

Drawing reference:

1) flat point DIN 78


© HEINRICH KIPP WERK GmbH & Co. KG



Clamping levers antistatic external thread, plastic grip



Drawings

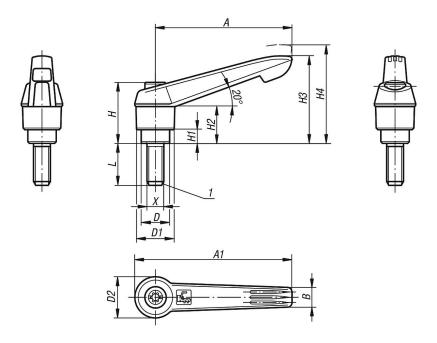

Overview of items

Clamping levers antistatic, external thread, plastic grip

Order No.	X	D	D1	D2	Н	H1	H2	Н3	H4	Α	A1	В	No. of teeth	L
K0269.1120624X20	M6	13,5	18	19,5	28,5	6,5	17,5	41,5	45,5	65	75	9,5	20	20
K0269.1120824X20	M8	13,5	18	19,5	28,5	6,5	17,5	41,5	45,5	65	75	9,5	20	20
K0269.1121024X20	M10	13,5	18	19,5	28,5	6,5	17,5	41,5	45,5	65	75	9,5	20	20