

## Swing clamps mini

### Item description/product images



### Description

**Material:**

Carbon steel.

Grip plastic.

**Version:**


Tempered, black oxidised.

Grip black.

**Note:**


Swing clamps are used where the clamping points must be free when the workpiece is loaded or removed.

\* Admissible hand force for the handle.

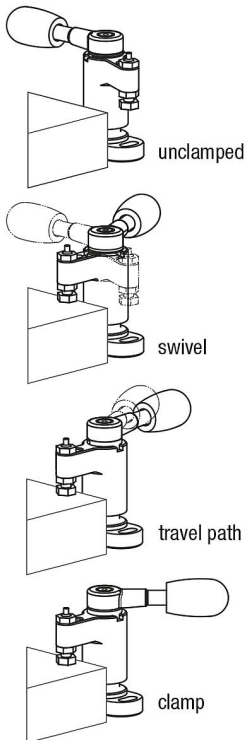


# Swing clamps mini







## Drawings

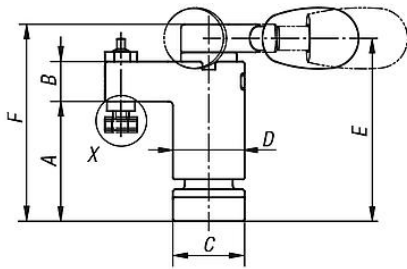

Right hand



Left hand

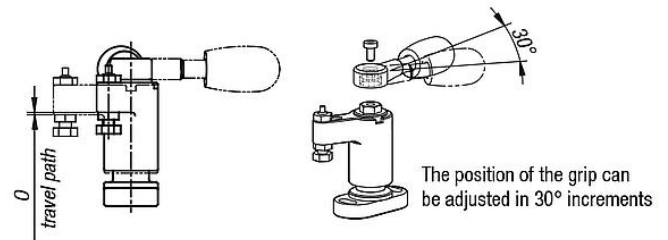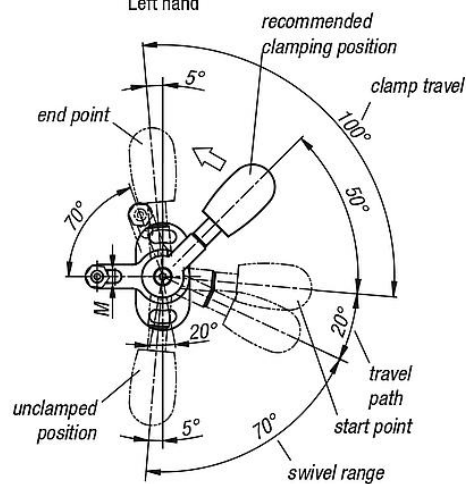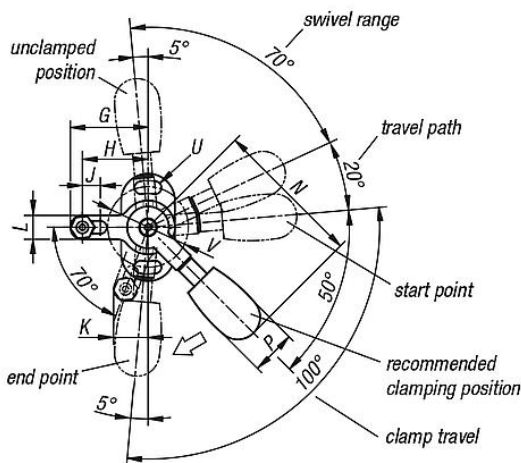

## Overview of items

### Swing clamps mini

Order No. left	Order No. right	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	X		Y	Y	F=retaining force N	Hand force FH N
																								min.	max.				
K0926.0100	K0926.1100	30	10	18	18	45,8	49	26	22	1	6	11,5	8	4,3	50	0,8	15	36	6	22,8	M4	4,3	27	22,3	25,3	21,9	24,9	1100	100*
K0926.0150	K0926.1150	40	14	23	23	61,3	66	35	30	1,4	8	15,3	10	5,3	63	1,1	20	45	8	28,5	M5	5,3	34	30,6	34	31,5	34,9	1800	150*
K0926.0200	K0926.1200	50	18	30	30	76,5	82	45	37	1,5	8	20,7	16	8,4	80	1,4	26	65	12	45,5	M8	8,4	48	31,7	39,7	32,7	40,7	2200	200*
K0926.0300	K0926.1300	60	22	40	40	93	100	55	45	1,9	8	25,4	20	10,4	100	1,7	33	85	15	57	M10	10,5	64	35,5	46,9	38	49,4	3500	300*